


THE CLEAR CHOICE

TM-6700 AUTOMATIC L-BAR SEALER

TRACO
MANUFACTURING, INC.

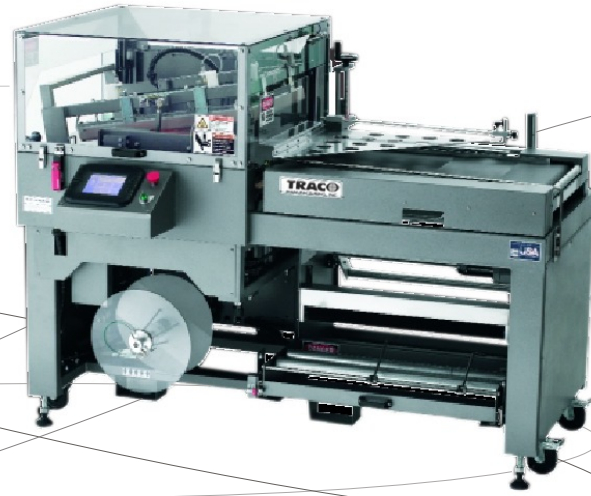

NEW TM-6700 DELIVERS THE FEATURES AND PERFORMANCE TODAY'S OPERATIONS DEMAND!

The TM-6700 has the advantages you need—enhanced Allen-Bradley microprocessor PLC, touch-screen interface and I/O diagnostics, memory for up to 10 package sizes, PLC and interface tunnel controls, self-adjusting scrap take-up wheel, microperforators for uniform air evacuation—and much more. All resulting in an automatic L-bar sealer with outstanding speed, throughput and performance to maximize productivity and profits.

Standard Features:

- * Allen-Bradley microprocessor or base controller (PLC)
- * Touch-screen interface with diagnostics
- * Product memory for up to 20 package configurations
- * Heavy-duty hot knife seal system with 18" x 23" seal area
- * Lower film cradle with film splitter and static eliminator
- * Adjustable height sealing jaws for products up to 8" high
- * Product alignment guides
- * Horizontal and vertical product sensors
- * Variable speed conveyors - 15 to 100 fpm
- * Package speed up to 40 per minute (depending on package size and film type)
- * Self-adjusting scrap take-up reel
- * Micro-Perf perforators for uniform air evacuation
- * Variable-speed film unwind
- * 23" maximum film width
- * Casters and levelers
- * Made in U.S.A.
- * One year limited warranty

Specifications:

- * 110V, 1 cfm, 80 psi, 120V, 15 amps
- * Overall dimensions: 69"L x 50"W x 51"H

Options:

- * Various seal knife options available
- * Tunnel controls integrated through PLC and interface (7221 and 6022 Tunnels)
- * Closing conveyor
- * Printed film registration
- * Split conveyor for product staging
- * Light package takeaway
- * And many more

THE CLEAR CHOICE

T-6022 SHRINK TUNNEL

Standard Features:

- * Chamber opening: 22"W x 34"L x 10"H
- * 9,000 watts of heating power
- * Variable-speed, live/dead roller conveyor
- * Air-cooled controls
- * Fully insulated heat chamber
- * Precision digital temperature control
- * Automatic cool down
- * Horizontal and vertical product sensors
- * 360° air flow heat-transfer system with 3/4 HP blower
- * Double entry and exit curtains for greater efficiency
- * Adjustable levelers
- * USDA approved
- * Made in U.S.A.
- * One-year limited warranty

Specifications:

- * 230V, single phase, 48 amps
- * Overall dimensions: 60"L x 38"W x 63"H



Options:

- * 1" roller spacing
- * Casters
- * Integrated controls with TM-6700 Series Automatic L-Sealer
- * Mesh belt conveyor



T-6022 HEAT SHRINK TUNNEL

Ideal for use with TM-6700 automatic L-bar sealer (shown below, left) and many other automatic and semi-automatic models.

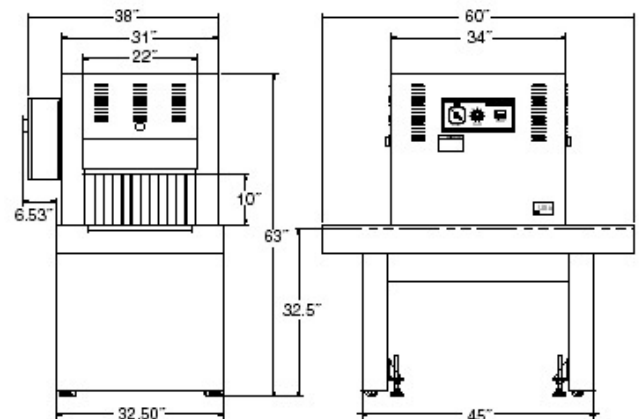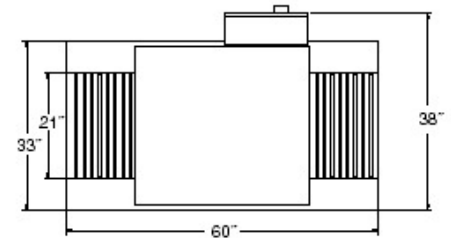

TRACO
MANUFACTURING, INC.

TracoPackaging.com • info@traco-mfg.com

Specifications and design features subject to change without notice.
Some photos may show accessories not part of basic machine.

voice: 800.284.9727 • fax: 888.447.9727
620 S 1325 W • Orem UT 84058